


Moly-Lube

Moly based dry lubricant

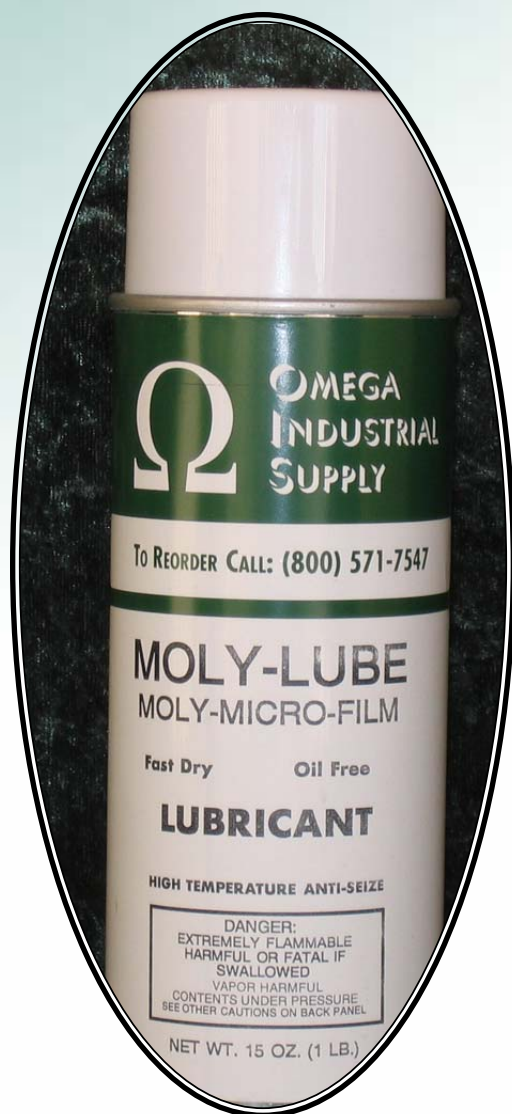

MOLY-LUBE is an excellent anti-friction and anti-seize lubricant that contains micron-sized molybdenum disulfide. It is oil free, fast drying, and will not attract dust. Suitable for temperatures from -110° to +1050° F. Also withstands pressures up to 100,000 psi. **MOLY-LUBE** is inert to water, oil, alkalis, salt solutions, and many acids. Will adhere to all metals, most plastics, glass and rubber. Excellent anti-seize properties were maintained with steel bolts in super heated steam installations after exposure to 1050 degrees and 20% salt solutions! Meets MIL spec MIL-A-907D, anti-seize compound High Temp.

Directions: Shake vigorously before each use. Clean area with Omega's **MEGA POWER** degreaser. Hold can about 8 to 10 inches from surface and saturate area to be lubricated.

Areas of Use:

- *ovens and conveyors
- *rubber mold release
- *engine components
- *aircraft
- *chemical plants
- *printing
- *chain lubrication
- *machine tools

Health	2
Flammability	3
Reactivity	0
Protection	

Appearance and odor.....	Black liquid, slight odor
Specific Gravity.....	Concentrate - 1.28
Propellant.....	Hydrocarbon
VOC.....	352 grams per liter
NFPA Fire Rating.....	Extremely Flammable Spray

ONLY OMEGA™

Fairfield, CA 94534

1-800-571-7347 www.onlyomega.com Fax: 707-864-8134